



TECHNICAL DATA

FROM

Anemostat[®]

DOOR PRODUCTS

A MESTEK COMPANY

P.O. BOX 4938 • 1220 WATSONCENTER ROAD
 CARSON, CA 90745-4206
 (310) 835-7500 • FAX (310) 835-0448

e-mail: door@anemostat.com • website: www.anemostat.com


WoodPro[™]

LO-PROFILE
 METAL VISION FRAME
 WITH WOOD VENEER
 PATENT PENDING



FIRE RATED BY
 UNDERWRITERS'
 LABORATORIES

DETAIL DRAWING

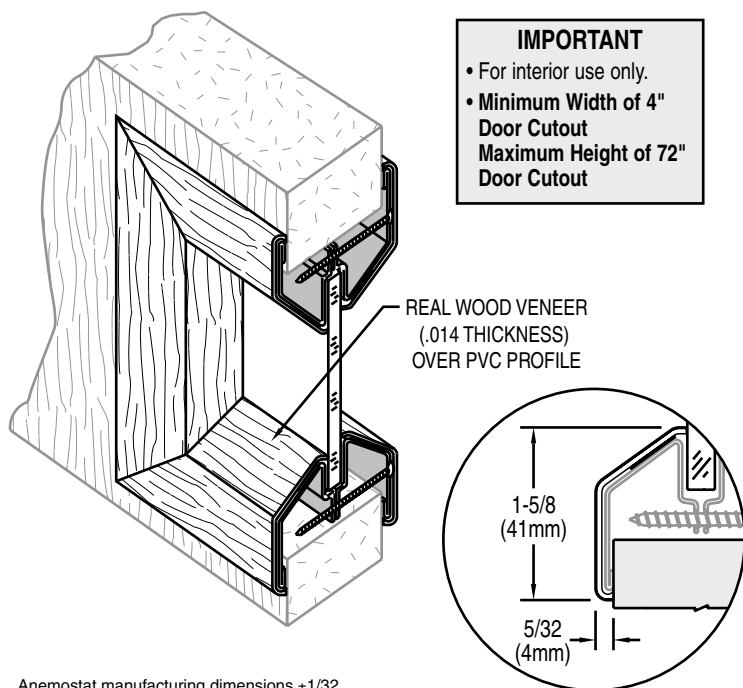


IMPORTANT

- For interior use only.
- Minimum Width of 4" Door Cutout
- Maximum Height of 72" Door Cutout

Dimensions for Wood Veneers

Anemostat manufacturing dimensions ±1/32
 Actual dimensions are nominal and may vary
 based on component manufacturers tolerances.

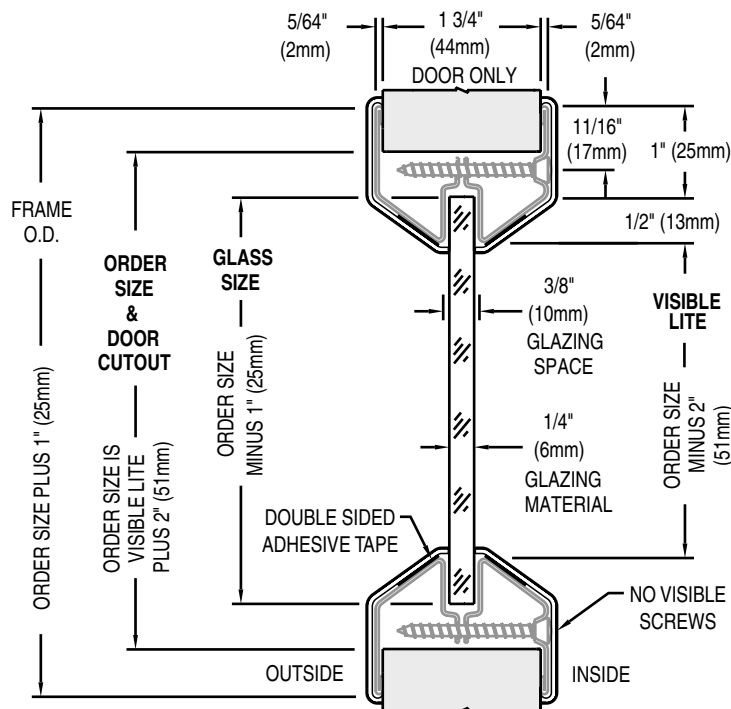

Dimensions Shown for LoPro Metal Vision Frame

STANDARD PRODUCT FEATURES

- **MATERIAL:** Frame: 20 GA. Cold Rolled Steel (LoPro Vision Frame).
 Wood Veneer: PVC and Wood Veneer
- **FINISH:** Unfinished Red Oak, Maple, Cherry, or Mahogany over Beige Enamel LoPro.
- **INSTALLATION:** WoodPro is easy to install and provides a low profile, flush to the door real wood finish. Uses 1 3/4" sheet metal screws that pass through the door cutout, and fastens to the opposite side of the vision frame. The formed wood veneers are pre-mitered with self-adhesive tape for ease of installation. Wood putty or putty stick may be required at miters to fill any small gaps.
- **DOOR THICKNESS:** For 1 3/4" Wood Doors.
- **AESTHETICS:** Tight mitered corners, beveled glass stop and a low profile to provide a clean, tapered look. Veneers are unfinished real wood. No Visible Screws after installation.
- **GLAZING:** Glazing Space will vary based on Glazing Material and will determine thickness of Glazing Tape used. Glazing Material should be fire and safety rated for use as a door lite with U.L. markings when used in a fire rated assembly.
- **IMPORTANT:** Interpretation of building and fire codes may vary. Consult with the local authority having jurisdiction in your area, to determine appropriate standards.

OPTIONAL FEATURES

- **SPECIALS:** Veneers sold separately for use on existing LoPros. Consult Factory (Requires a compound miter cut by installer.)
- ### FIRE RATINGS (w/ U.L. classification markings) Positive Pressure
- **20 MINUTE:** Approved listing at 2520* sq. in. visible lite. (max. width 36", max. height 70").
 - **45/60 MINUTE:** Approved listing at 2520* sq. in. visible lite. (max. width 36", max. height 70").
 - **90 MINUTE:** Approved listing at 1296* sq. in. visible lite. (max. width 36", max. height 54").
- *Must be used with FIRELITE Plus or NT and Fire listed glazing tape or another manufacturer's equivalent product. Glazing combination must be used in appropriately tested door assembly.
- **PLEASE NOTE:** On visible lite sizes larger than 1296 sq. in. on 20/45 min. and 100 sq. in. on 60/90 min., please consult with your Door / Frame Manufacturer's procedures, for their maximum glass size tested.

Job Name & Location	Submitted by