


DOOR HOLDER



No.	Base	Arm Length	ANSI
584	1-5/8" x 1-7/8"	4"	L11381
584-5	1-5/8" x 1-7/8"	5"	L11381
585	1-7/16" x 2-1/8"	4"	L11381
585-5	1-7/16" x 2-1/8"	4"	L11381
582	1-1/2" x 6-1/4"	1-5/8" Throw	L11401
583	1-15/16" x 5-3/8"	1-1/4" Throw	L11401

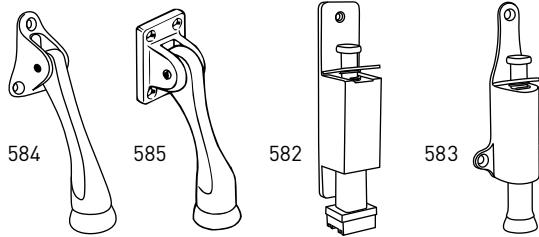

Number 584/584-5

Constructed of solid brass or bronze for a more desirable appearance.

Number 585/585-5

A rugged cast iron kick down holder with a replaceable non-marring rubber shoe. Available in sprayed finishes.


DOOR STOPS





No.	Description	Material	Dimensions	ANSI
510	Low Dome Stop	Cast Brass or Bronze	1-3/4" Base x 1" High	L12141
520	High Dome Stop	Cast Brass or Bronze	1-3/4" Base x 1-1/4" High	L12161
525	Dome Stop Riser	Cast Brass or Bronze	1-3/4" Base x 3/8" High	-
527	Heavy Duty Floor Stop	Cast Brass or Bronze	2-1/8" Projection	L12131
528	Heavy Duty Floor Stop	Cast Brass or Bronze	2-7/8" Projection	L12131
529	Heavy Duty Floor Stop w/Hook	Cast Brass or Bronze	3-1/8" Projection	L11371
530	Heavy Duty Wall Mount Door Stop	Cast Brass or Bronze	2-1/2" Base x 3-5/8" Projection	L12021
531	Heavy Duty Wall Mount Door Stop w/Hook	Cast Brass or Bronze	2-1/4" Base x 3-5/8" Projection	L11531
533	Automatic Wall Type Holder	Cast Brass	3-1/2" Wall to Door	L11291
534	Automatic Floor Type Holder	Cast Brass	1-1/4" Strike Height	L11301
535	Heavy Duty Floor Stop	Cast Brass or Bronze	2-1/2" Base x 3" High	L12131
536	Heavy Duty Floor Stop w/Hook	Cast Brass or Bronze	2-1/4" Base x 3-5/8" High	L11371
540	Heavy Duty Floor Stop	Black Rubber	3" Base x 2" High	-
541	Heavy Duty Floor Stop w/Hook	Black Rubber	3" Base x 2" High	-
542	Heavy Duty Floor Stop	Black Rubber	2" Base x 1-1/2" High	-



Solid diecast brass construction designed to minimize stumbling hazards and cleaning interference. Non-marring rubber is attached in a tamper-proof manner to prevent theft.

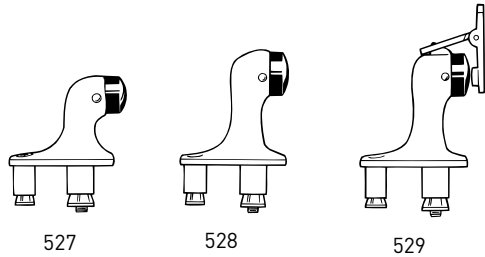

Commercial grade door stop for high traffic conditions. Solid cast brass or bronze heavy duty construction. Includes mounting hardware for all floor construction applications. Functions as a hold open device when hook is manually engaged in strike. Unit requires manual disengagement to release.

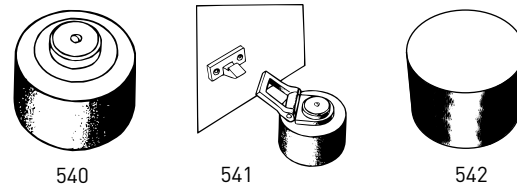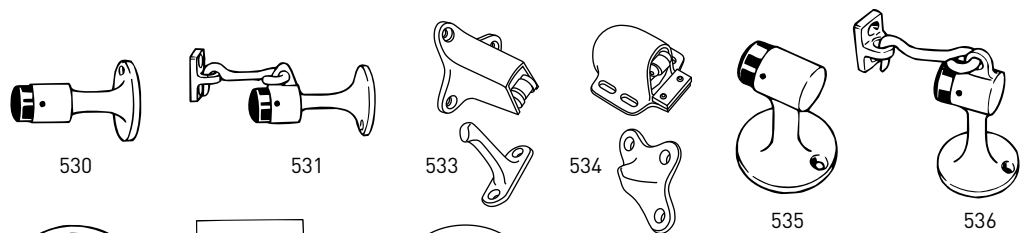

540, 541 & 542 are heavy rubber stops. 540 & 541 include the 4-1/2" lag bolt & lag shield. Model 542 is installed with anchoring grout for a permanent installation.