

ACCESS CONTROL DOORS

ACCESS CONTROL

DTX-2000 SERIES - STAND ALONE

2000 Series Stand Alone Access Control - Provides affordable single-door security application in new or existing structures, providing service and security in most environments. These easy-to-install units offer control of unauthorized access and egress with multi-user capabilities and flexible keypad programming. The IEI electronics for each keypad are conformal coated to provide excellent protection from the elements for Indoor/Outdoor use.



DTX-2100

- 500 Users
- Backlit, hardened alpha-numeric keys
- Polycarbonate trim
- Light/medium duty
- Key-press feedback via built-in, assignable sounder and yellow LED
- Bi-color Red/Green LED for relay status
- Single gang flush mount design



DTX-2110

- 500 Users
- Metal braille alpha-numeric keys
- Brushed metal trim
- Heavy duty/harsh conditions
- Key-press feedback via built-in, assignable sounder and yellow LED
- Bi-color Red/Green LED for relay status
- Single gang flush mount design



DTX-2120

- 120 Users
- Surface mount - fits on door mullion
- Backlit, hardened alpha-numeric keys
- Aluminum enclosure
- Light/medium duty
- Door position monitoring
- Door ajar, forced door, alarm shunt outputs
- Sounder
- Door bell relay




DTX-2300

- 2000 Users
- 2 relays
- Inputs for request to exit and door position
- Bi-color LED indicates operation
- Prox reader can be removed & mounted up to 10 feet from keypad
- Weather resistant design
- HID 26-40 bit format card compatibility
- HID corporate 1000 compatible
- Glass mount option
- Single gang flush mount design

DTX-4000 SERIES - ACCESS CONTROL SYSTEMS

DTX-4100 Multi-Door Keypad System (USB or Network) - Provides a powerful and easy to install system for small to mid-sized applications. System management from a PC can be either over a LAN/WAN connection or through a RS485 serial connection with programming via the software. System expansion is simplified with the modular design. The IEI electronics for each keypad are conformal coated to provide excellent protection from the elements for Indoor/Outdoor use.

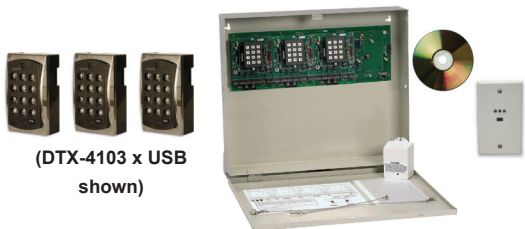

(DTX-4103 x USB shown)

- 2000 Users
- Backlit, hardened keys on keypad
- Network up to 16 doors
- 2000 transaction storage per door
- First-In auto unlock
- Error lockout
- Built-in assignable sounder
- Key-press feedback via sounder and yellow LED
- Bi-color Red/Green LED for relay status
- Polycarbonate trim
- Single gang flush mount design

DTX-4300 Multi-Door Proximity Reader/Keypad (USB or Network) - Provides a fully integrated PC managed multi-door system and standard access control functionality. The software allows the management of people and doors through easy to create reports and step-by-step wizard assisted expanded features. Software communicates to the DTX-2300 either by LAN/WAN or RS485 connection. The IEI electronics for each keypad are conformal coated to provide excellent protection from the elements for Indoor/Outdoor use.



(DTX-4302 x USB shown)

- 2000 Users
- Integrated door control, proximity reader and keypad
- 2000 event audit trail
- 32 doors per site
- Bi-color LED Indicates operation
- HID 23 - 40 bit format card compatibility
- HID Corporate 1000 compatibility
- Remote proximity reader mounting
- Single gang flush mount design

All DTX-2000 and DTX-4000 Series Access Controls are UL 294 Listed and have a 3-year warranty.