

Engineered to Perform





**10  
YEAR  
Guarantee**



## TS7002/03/04 - Floor Springs

High performance cam and roller mechanisms. TS7003 is fixed power 3; TS7004 is fixed power 4. Ideally suited for use in hospitals, surgeries, nursing homes etc, where easy opening is required.

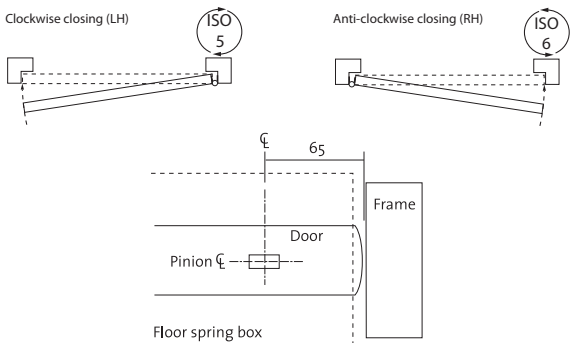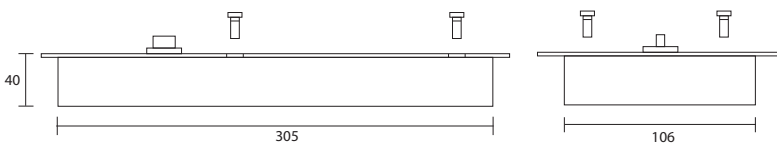

All dimensions in mm.

### BS EN 1154 Classification

TS7000 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

3	8	3	1	1	2
---	---	---	---	---	---

### Product Specification

Power size	
EN2	Optional TS7002
EN3	TS7003
EN4	TS7004
Mechanism	Cam and roller
Adjustable closing speed	Yes
Adjustable latch action	Yes
Adjustable back check	Yes
Max door width (mm) EN 2/3/4	850/950/1150
Max door weight (kg) 2/3/4	70/105/150
Opening angle	130°
LH and RH doors - universal application	Yes

Note: Push or pull slide of the door subject to rebate distances  
Optional is not covered by CE or Certifire

### TS7000 Series Options

Double action arms	Yes
Single action arms (handed)	Left or right handed
Hold-open (Not to be used on fire doors)	90°
Available finishes	SSS, PB
Extension spindles	3, 5, 7.5, 10, 12.5, 15, 20, 25, 27mm

### BS EN 1634 Fire Test

TS7000 closers have been tested to EN 1634 Test certificates are available on request.



1121 284



Certificate No. WQM 132