




TS6204 - Standard Arm Closer

Medium duty, multi-purpose overhead door closer suitable for most applications.

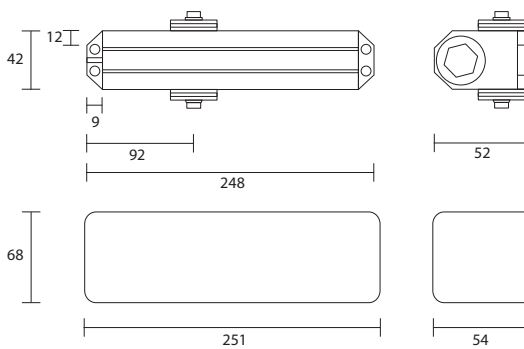

All dimensions in mm.

BS EN 1154 Classification

TS6204 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

4	8	4 3	1	1	3
---	---	--------	---	---	---

BS EN 1634 Fire Test

TS6204 closers have been tested to EN 1634 for 30, 60 and 120 minute door sets. Test certificates are available on request.

Product Specification

Power size (adjustable by spring)	
EN2 (up to 850mm / 45kg)	Optional
EN3 (up to 950mm / 60kg)	Yes
EN4 (up to 1100mm / 80kg)	Yes
Mechanism	Rack and Pinion
Adjustable closing speed	Yes
Adjustable latch action	Yes
Adjustable delayed action	Optional
Adjustable back check	Yes
Max door width (mm)	1100
Max door weight (kg)	80
Opening angle	180°
LH and RH doors - universal application	Yes
Fire Rated (BS EN 1634-1: 2000)	Yes

TS6000 Series Options

Drop plate	Optional
Available finishes	Silver and Plated

Optional: Not covered by CE marking



1121



Certificate No. WQM 132